




MANUAL ANALOG OVERRIDE SWITCH

RIBMNA1D0

2.75" Track Mount Manual Analog Override Switch + Monitor with 24 Vac/dc Power Input

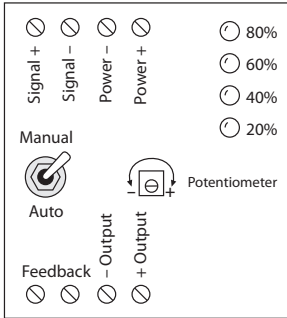

Legend for Selecting Output for Jumpers

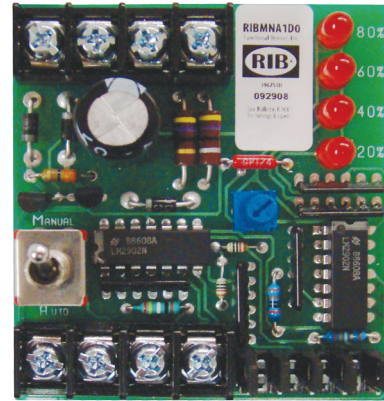

RELAYS

SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Dimensions:** 2.450" x 2.750" x 1.270"
- Track Mount:** 2.750", See MT212 Series on page 142
MT212 Mounting Track Sold Separately
- Input Voltage:** 24 Vac/dc
- Input Current:** 90mA Max.
- Range/Impedance Override:** 0-5 Vdc, 200 Ω Min.
0-10 Vdc, 400 Ω Min.
0-15 Vdc, 1 kΩ Min.
0-20mA dc, 500 Ω Max.
- Feedback Contact:** 2A Max. @ 24 Vac/dc

Notes:

- Set the jumpers according to your input signal (Analog signal from the controller.) Example: When controlling a damper with 0-10 Vdc, the jumpers need to be in position for the 0-10 Vdc override range. If the LED range does not match your analog scale, ensure the jumpers are set for the proper range.
- Feedback contact closed when switch is in Manual position, open when switch is in Auto position.

- **PROVIDES MANUAL OVERRIDE IF CONTROLLER DOES NOT SUPPORT OVERRIDE CAPABILITY**
- **ALLOWS YOU TO MANUALLY MAKE ADJUSTMENTS TO YOUR END DEVICE REMOTELY INSTEAD OF AT YOUR CONTROL PANEL**
- **SENDS OVERRIDE STATUS BACK TO CONTROLLER VIA FEEDBACK**
- **MULTI-RANGE ANALOG OUTPUT**