



I/O EXPANDER

RIBMN24Q4C

2.75" Track Mount 4 Output I/O Expander with 24 Vac/dc Power Input and 0-10 Vdc / 0-5 Vdc Control Input

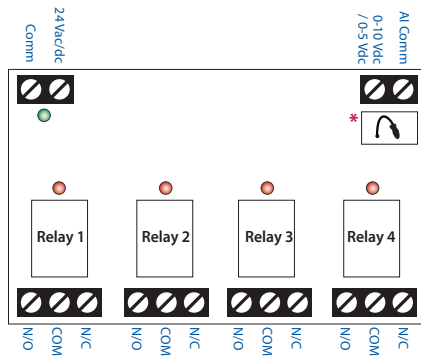

0-10 VDC CONTROL VOLTAGE	0-5 VDC * CONTROL VOLTAGE	RELAY 1 STATUS	RELAY 2 STATUS	RELAY 3 STATUS	RELAY 4 STATUS
0-0.372Vdc	0-0.186Vdc	OFF	OFF	OFF	OFF
0.726-1.000Vdc	0.363-0.500Vdc	ON	OFF	OFF	OFF
1.354-1.626Vdc	0.677-0.813Vdc	OFF	ON	OFF	OFF
1.982-2.254Vdc	0.991-1.127Vdc	ON	ON	OFF	OFF
2.608-2.882Vdc	1.304-1.441Vdc	OFF	OFF	ON	OFF
3.236-3.508Vdc	1.618-1.754Vdc	ON	OFF	ON	OFF
3.864-4.136Vdc	1.932-2.068Vdc	OFF	ON	ON	OFF
4.492-4.764Vdc	2.246-2.382Vdc	ON	ON	ON	OFF
5.118-5.392Vdc	2.559-2.696Vdc	OFF	OFF	OFF	ON
5.746-6.018Vdc	2.873-3.009Vdc	ON	OFF	OFF	ON
6.374-6.646Vdc	3.187-3.323Vdc	OFF	ON	OFF	ON
7.000-7.274Vdc	3.500-3.637Vdc	ON	ON	OFF	ON
7.628-7.902Vdc	3.814-3.951Vdc	OFF	OFF	ON	ON
8.256-8.528Vdc	4.128-4.264Vdc	ON	OFF	ON	ON
8.884-9.156Vdc	4.442-4.578Vdc	OFF	ON	ON	ON
9.510-10.000Vdc	4.755-5.000Vdc	ON	ON	ON	ON

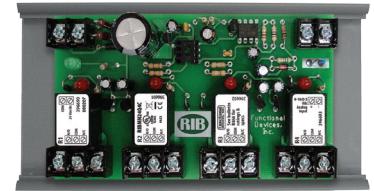

RELAYS

GREAT FOR STAGING LOADS SUCH AS CHILLERS, PUMPS, ACTUATORS, OR MULTI-STAGE HEATING

SPECIFICATIONS

- # Relays & Contact Type: Four (4) SPDT Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Power Status: Green LED On = Power On
- Relay Status: Red LED On = Relay Activated
- Dimensions: 4.950" x 2.750" x 1.750"
- Track Mount: MT212-6 Mounting Track Provided
- Approvals: UL Listed, UL916, C-UL, CE, RoHS
- Gold Flash: No
- Override Switch: No

- Contact Ratings:
 - 15 Amp General Use @ 125 Vac
 - 10 Amp General Use @ 277 Vac
 - 10 Amp Resistive @ 30 Vdc (N/O)
 - 7 Amp Resistive @ 30 Vdc (N/C)
 - 1/2 HP @ 125 Vac
 - 1 HP @ 250 Vac
 - 1/4 HP @ 277 Vac
 - 470 VA Pilot Duty @ 125 Vac
 - 770 VA Pilot Duty @ 250 Vac

- Power Input:
 - 24 Vac/dc ; 50-60 Hz
 - 200mA max.

- Notes:
 - Must clip resistor in white box for 0-5Vdc.*
 - Custom Programming Available for Large Orders.